





Tuscany is a region renowned for its rustic and elegant architecture, with ancient houses scattered on the hills that seamlessly blend into the landscape, evoking an almost timeless atmosphere. The Chianti collection, pays homage to an iconic element of Tuscan architecture and design, seamlessly integrating with the ambiance of the Chianti region.

CHIANTI



An ancient material reworked with artisanal sensitivity by modern and advanced technology, constantly reinterpreting itself over time in increasingly innovative and natural ways. Terracotta is tradition, craftsmanship, and handmade quality. It's rediscovering an authentic and valuable Italian essence.

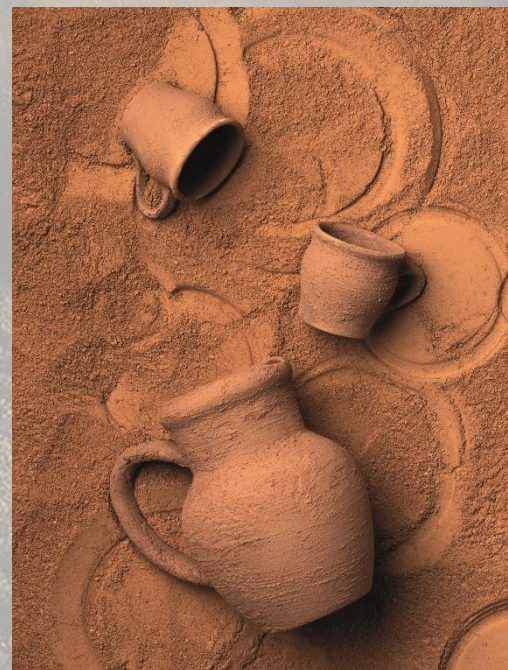

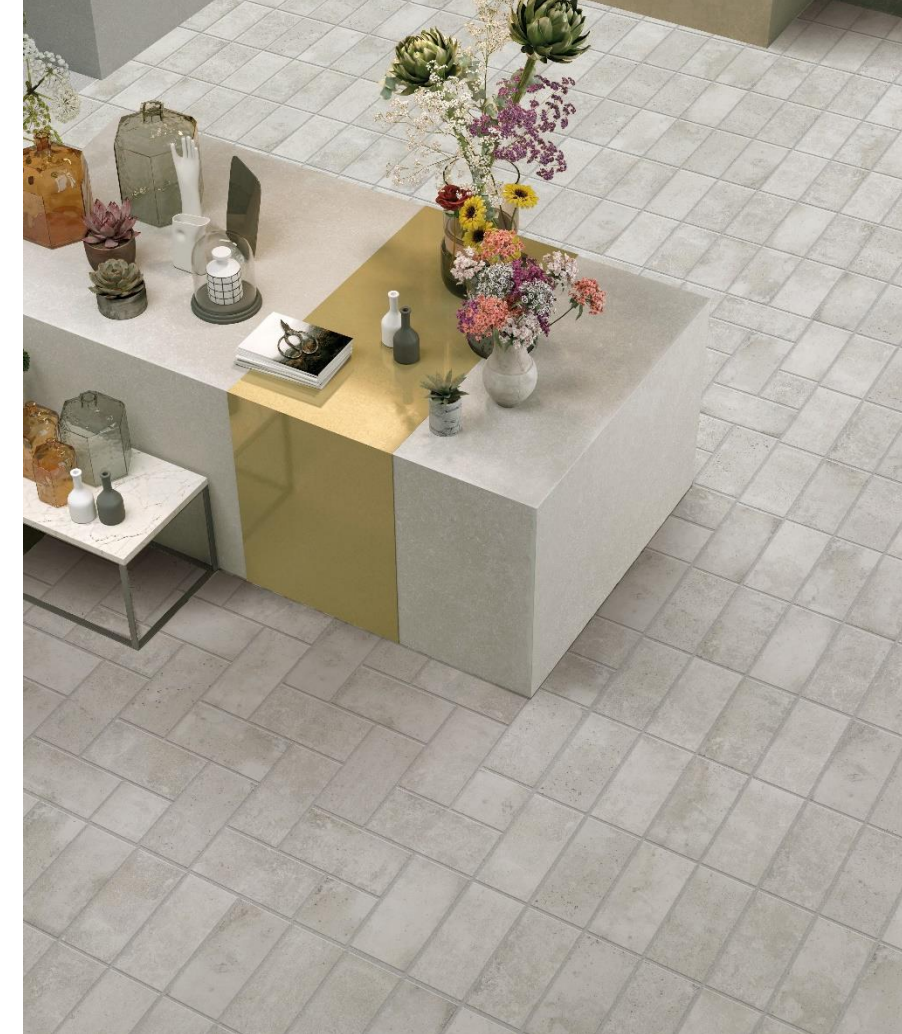


Thanks to their distinctive aesthetics, the four shades of Chianti are suitable for a variety of design styles, including rustic, traditional, and even modern. They can be used in indoor spaces such as kitchens, dining rooms, living rooms, and also in outdoor areas like patios and courtyards.

The collection is available in 125x250mm format in four strongly stonewashed nuances. This colour variation includes shades of beige, brown, grey, and pink among other earthy tones contributing to a dynamic appearance. They incorporate speckles, spots and small surface imperfections that add a touch of authenticity and rusticity to the overall look. These features contribute to giving the floors a lived-in and natural appearance.

Chianti Images (Clockwise from left)
Grey, White, Terracotta, Rosa
Front Cover: Rosa




CHIANTI

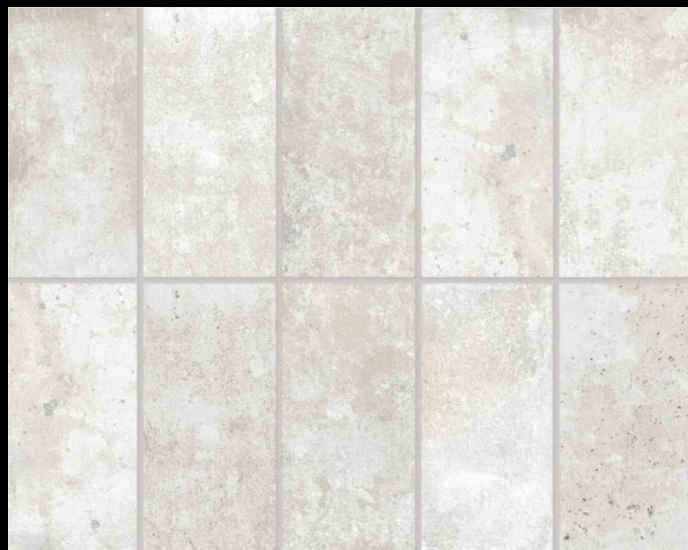


Bianco White

12CIAWHM

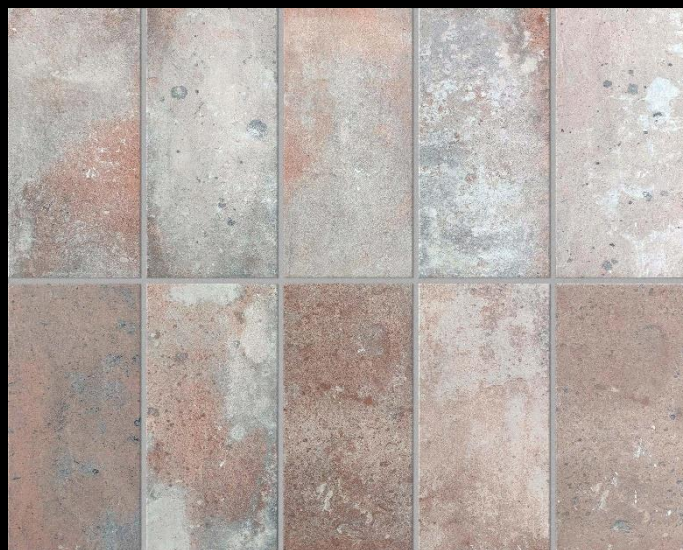


Rosa

12CIAROM

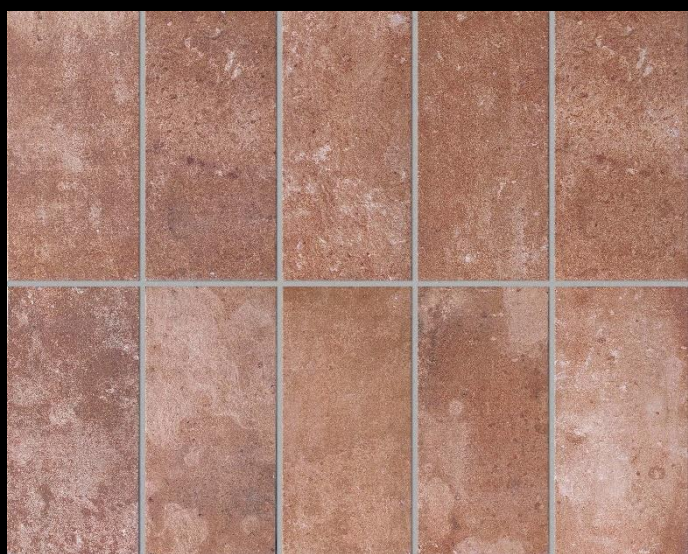

Rosso Terracotta

12CIATEM

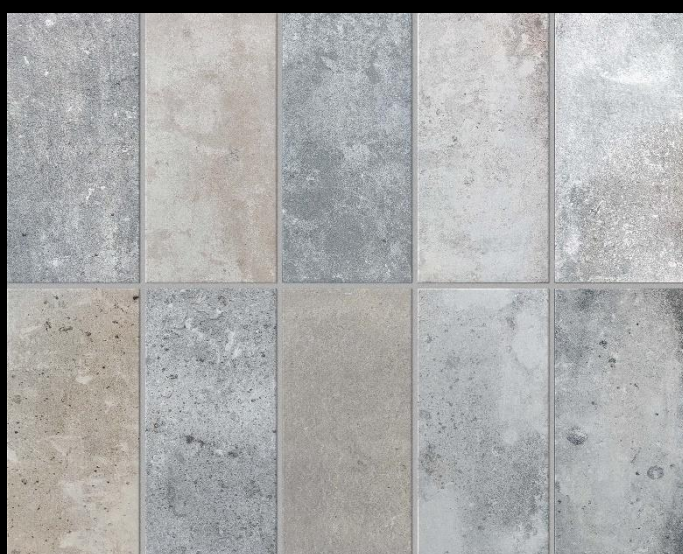

Grigio Grey

12CIAGYM

125x250mm
Matt

Technical
Porcelain



Cushioned
Edge

V4
Variation



GNS Ceramics recommends that our retail shops pass on the following information to the installer and end-user.



Click or Scan for
Installation Instructions


Ceramic tiles are only one component of a much larger building system. It is our experience that failure of any tiling system is very often the result of a combination of factors. For example; inappropriate design, type of substrate, surface preparation, temperature during installation, adhesives, incompatibility of products, product failure, environmental factors skill and knowledge of the installers etc; the latter being supplied or controlled by a variety of manufacturers and tradesmen. GNS Ceramics has no involvement in the design, selling and installation processes and once goods have been dispatched from our warehouse we have no control over where and how these products are used. As a result the project manager, and or the tiler are the only people in a position to ensure that all the components used in a project are compatible and that the product is installed in accordance with the Australian Building Code and the Australian Standards.

Installation Instructions for all types of tiles can be found in the GNS Ceramics Price List, and on our website. We suggest these are followed at all times.


Cleaning and Maintenance

Do not use abrasive cleaners and chemicals which could permanently scratch and damage the surface of the tile. For daily cleaning we recommend the use of a mild PH Neutral detergent. Should a more vigorous cleaning programme be required we recommend the use of a proprietary tile cleaner from a specialty tile supplier.


Colour & Pattern Variation Guide




Uniform Appearance



Slight Variation



Moderate Variation



High Variation

Slip Resistance

The best way to minimise the risk of slipping is through safe design principals. This involves a risk management approach which evaluates the likelihood and consequence of an incident to occur. Slip resistive flooring is only one of the design components to consider, other design features should also be considered, including awnings, airlocks, matting and a suitable cleaning regime to reduce the extent of contaminants. Visual aids, warning signs, handrails and lighting, along with the footwear to be worn, should also be considered.

All ceramic tiles can be slippery, particularly when wet. This includes tiles, commonly used in wet areas such as bathrooms. It is important that customers be aware of the potential danger of wet ceramic tiles and seek advice from the retailer as to the level of slip-resistance of any particular tile, and its suitability for the intended application. If there is any doubt, tiles should be tested for slip-resistance immediately after being laid, under the conditions that they will be subject to during use. While tiles may achieve an acceptable standard in a laboratory test, it is quite probable that the performance in-situ will be less than expected, due to installation methods, wear & tear, cleaning regimes and unforeseen circumstances. Test results should therefore to be seen as a relative guide to estimate the merits of one tile versus another and should be used in conjunction with the Australian Building Code and the relevant Australian Standards. Further information on slip resistance is provided in the Australian Standards HB198:2014 - An Introductory guide to the slip resistance of pedestrian surface materials.

There are many factors beyond the control of the supplier that can affect the level of slip-resistance of tiles, or contribute to the incidents of injury through slipping. Consequently, the laboratory test results presented here must not be viewed to mean that GNS Ceramics Pty Ltd, is providing any warranty, nor will accept any liability for personal injury or accidents arising from the selection or installation of tiles under any circumstances.

Classes of Use

The classification has taken into account the recommendations of the Australian Standards; however, they are given for general guidance only. They are valid for the given application under **NORMAL CONDITIONS** and should not be taken to provide accurate product specifications for specific requirements.

WARNING: Other standards and building code requirements may affect your selection of tiles.

Consideration should be given to the footwear, type of pedestrian traffic and cleaning methods expected. Floors should be adequately protected against soiling from following trades during installation; they should also be protected against scratching dirt at the entrances to building by interposing footwear cleaning devices. For example, mats, shoe scrapers, static devices, etc.

CLASS 5 - Floor coverings that are subject to severe pedestrian traffic over sustained periods with some scratching dirt, so that the conditions are the most severe for which tiles may be suitable; For example, shop, foyers, and some light industrial applications.

Caratteristiche tecniche Technical characteristics Caractéristiques techniques Technische merkmale		Norma di riferimento Reference standard Norme de reference Prüfmethode	Valore richiesto Required value Valeur requise Sollwert	
	Dimensioni Dimensions Dimensions Abmessungen	ISO 10545-2	Conforme Compliant Conforme Konform	
	Assorbimento d'acqua Water absorption Absorption d'eau WASSERAUFNAHME	ISO 10545-3	≤ 0,5 %	
	Resistenza a flessione Modulus of rupture Resistance a la flexion Biegefestigkeit	ISO 10545-4	Modulus of ropture R ≥35 N/mm ² Breaking strength S ≥1300 n	
	Resistenza all'abrasione Abrasion resistance Résistance à l'abrasion Abriebbeständigkeit	ISO 10545-7	PEI Solo per piastrelle smaltate Only for glazed tiles	
	Dilatazione termica lineare Linear thermal expansion Dilatation thermique lineaire Lineare Wärmeausdehnung	ISO 10545-8	≤ 9x10 ⁻⁵ °C ⁻¹	
	Resistenza agli sbalzi termici Thermal shock resistance Resistance aux écarts de tempe- rature Temperaturwechselbeständigkeit	ISO 10545-9	Resistente Resistant Resistant Beständig	
	Resistenza al gelo Frost resistance Resistance au gel Frostbeständigkeit	ISO 10545-12	Resistente Resistant Resistant Beständig	
	Resistenza agli acidi ed alle basi Acid and alkali resistance Resistance aux acides et aux bases Säure- und Laugenbeständigkeit	ISO 10545-13	CLASS GB MIN.	
	Resistenza all'attacco chimico Chemical resistance Resistance à l'attaque chimique Chemische Beständigkeit	ISO 10545-13	CLASS GB MIN.	
	Resistenza alle macchie Stain resistance Resistance au taches Fleckenbeständigkeit	ISO 10545-14	CLASS 5 MIN.	
	Coefficiente di attrito (scivolosità) Friction coefficient (slipperiness) Coefficient de friction (glissement) Reibungskoeffizient (Rutschigkeit)	BCR - Italia DM del 14-06-89		ASTM - USA ASTM C1028
		Dry rubber 0,62	Wet rubber 0,51	Dry leather 0,62
			Dry neolythe 0,69	Wet neolythe 0,62
THE PRODUCTS HAVING AN ABSORPTION < 0,5% ARE CLASSIFIED ACCORDING THE UNI CEN STANDARDS "FULLY VITRIFIED TILES" AND ACCORDING TO THE ASTM STANDARDS "IMPERVIOUS TILES"				

**MODENA CENTRO PROVE s.r.l.**

Sede legale e Laboratori: 41123 Modena (Italy) - Via Sallustio, 78
Tel. 059 822417 r.a. - Fax 0598635115 - e-mail : info@modenacentroprove.it - www.modenacentroprove.com
C.C.I.A.A. Modena n. 228587 - Tribunale di Modena n° 2231 - C.F. e P. IVA n. 01592020364

MECCANICA**ECOLOGIA****CERAMICA****AUTOMOTIVE**

Modena, 09/11/23

To **KERADOM SRL**
VIA BOTTICELLI 10
42048 RUBIERA RE

Attn. **Dott. Matteo Cavazzoli**

MATERIAL and/or SAMPLE to be tested	Denomination of the Sample	Client Reference – Your delivery	date
Ceramic tiles	serie chianti antislip 12.5x25	Our withdrawal of samples	06/11/2023

Here attached, you will receive the Test Report of Serial No. **20237564**/n, which shows the results of tests required.

MODENA CENTRO PROVE

Laboratory Director
Dr. Falanga Giacomo
Dr. Falanga Giacomo



MODENA CENTRO PROVE s.r.l.
Sede legale e Laboratori: 41123 Modena (Italy) - Via Sallustio, 78
Tel. 059 822417 r.a. - Fax 059380281 - e-mail : info@modenacentroprove.it -
www.modenacentroprove.com
C.C.I.A.A. Modena n. 228587 - Tribunale di Modena n° 2231 C.F. e P. IVA n. 01592020364



TEST REPORT: 20237564/1

Modena, 09/11/23

CUSTOMER	KERADOM SRL - - VIA BOTTICELLI 10 - 42048 - RUBIERA - RE
MATERIAL and/o SAMPLE to be tested	Ceramic tiles;
Denomination	serie chianti antislip 12.5x25;
Date of sample reception	06/11/2023;
Date of sample acceptance	06/11/2023;
Kind of test executed	Determination of slip resistance of pedestrian surfaces – Methods of evaluation - Barefoot ramp test
Referring standards	DIN EN 16165:2023 Annex A
Shifting from standards	No one
Equipment	Torsion free platform cod. MCP C150
Subcontracted phases	No one
Sampling made by	Customer

The test results reported in this Test Report refer only to the sample sampled by our staff and / or given by the Customer as received.

The sample identification data were provided by the customer. Further additional information provided by the Customer will be reported in the Test Report with symbol #. If the information provided by the customer influences the validity of the results, MCP declines all responsibility.

Any changes / additions made to the Test Report after its first issue will be identified by underlining the text.

The Customer undertakes to reproduce this document in its entirety. Any form of partial reproduction is prohibited.

The storage times of the samples are indicated on the offer or contract to which this Test Report refers.

Examiner p.i. Bortolai Alberto	Examiner p.i. Nasseti Luca	MODENA CENTRO PROVE Ceramic Dept. Responsible P.I. De Pasquale Roberto	Laboratory Director Dr. Falanga Giacomo
--	--	---	---

**DETERMINATION OF SLIP RESISTANCE OF PEDESTRIAN SURFACES
METHODS OF EVALUATION - BAREFOOT RAMP TEST**

Beginning date : 07/11/2023

Analysis ending date : 08/11/2023

RESULTS

Surface structure: structured
 Ramp test value α_{barefoot} ⁽²⁾: 28
 Slip resistance class: C

⁽²⁾ rounded to the nearest 1 degree

Assessment classes (National Annex DIN EN 16165:2023 - NB - § NB.1)

Test result α_{barefoot}	Slip resistance class
$12^\circ \leq \alpha_{\text{barefoot}} < 18^\circ$	A
$18^\circ \leq \alpha_{\text{barefoot}} < 24^\circ$	B
$\alpha_{\text{barefoot}} \geq 24^\circ$	C



MODENA CENTRO PROVE s.r.l.
Sede legale e Laboratori: 41123 Modena (Italy) - Via Sallustio, 78
Tel. 059 822417 r.a. - Fax 059380281 - e-mail : info@modenacentroprove.it -
www.modenacentroprove.com
C.C.I.A.A. Modena n. 228587 - Tribunale di Modena n° 2231 C.F. e P. IVA n. 01592020364



TEST REPORT: 20237564/2

Modena, 09/11/23

CUSTOMER	KERADOM SRL - - VIA BOTTICELLI 10 - 42048 - RUBIERA - RE
MATERIAL and/o SAMPLE to be tested	Ceramic tiles;
Denomination	serie chianti antislip 12.5x25;
Date of sample reception	06/11/2023;
Date of sample acceptance	06/11/2023;
Kind of test executed	Determination of slip resistance of pedestrian surfaces – Methods of evaluation - Shod ramp test
Referring standards	DIN EN 16165:2023 Annex B
Shifting from standards	No one
Equipment	Torsion free platform cod. MCP C150
Subcontracted phases	No one
Sampling made by	Customer

The test results reported in this Test Report refer only to the sample sampled by our staff and / or given by the Customer as received.

The sample identification data were provided by the customer. Further additional information provided by the Customer will be reported in the Test Report with symbol #. If the information provided by the customer influences the validity of the results, MCP declines all responsibility.

Any changes / additions made to the Test Report after its first issue will be identified by underlining the text.

The Customer undertakes to reproduce this document in its entirety. Any form of partial reproduction is prohibited.

The storage times of the samples are indicated on the offer or contract to which this Test Report refers.

Examiner p.i. Bortolai Alberto	Examiner p.i. Nasseti Luca	MODENA CENTRO PROVE Ceramic Dept. Responsible P.I. De Pasquale Roberto	Laboratory Director Dr. Falanga Giacomo
--	--	---	---

**DETERMINATION OF SLIP RESISTANCE OF PEDESTRIAN SURFACES
METHODS OF EVALUATION - SHOD RAMP TEST**

Beginning date : 07/11/2023

Analysis ending date : 08/11/2023

RESULTS

Surface structure: structured
 Ramp test value $\alpha_{shod}^{(2)}$: 27
 Slip resistance class: R11

⁽²⁾ rounded to the nearest 1 degree

Assessment classes (National Annex DIN EN 16165:2023 - NB - § NB.2)

Test result α_{shod}	Slip resistance class
$6^\circ \leq \alpha_{shod} \leq 10^\circ$	R 9
$10^\circ < \alpha_{shod} \leq 19^\circ$	R 10
$19^\circ < \alpha_{shod} \leq 27^\circ$	R 11
$27^\circ < \alpha_{shod} \leq 35^\circ$	R 12
$\alpha_{shod} > 35^\circ$	R 13

**MODENA CENTRO PROVE s.r.l.**

Sede legale e Laboratori: 41123 Modena (Italy) - Via Sallustio, 78
Tel. 059 822417 r.a. - Fax 059380281 - e-mail : info@modenacentroprove.it -
www.modenacentroprove.com
C.C.I.A.A. Modena n. 228587 - Tribunale di Modena n° 2231 C.F. e P. IVA n. 01592020364



LAB N°1018L

Membro degli Accordi di Mutuo
Riconoscimento EA, IAF e ILACSignatory of EA, IAF and ILAC Mutual
Recognition Agreements**TEST REPORT: 20237564/3**

Modena, 09/11/23

CUSTOMER	KERADOM SRL - - VIA BOTTICELLI 10 - 42048 - RUBIERA - RE
MATERIAL and/o SAMPLE to be tested	Ceramic tiles;
Denomination#	serie chianti antislip 12.5x25;
Date of sample reception	06/11/2023;
Date of sample acceptance	06/11/2023;
Kind of test executed	Slip resistance of pedestrian surfaces materials
Referring standards	AS 4586:2013 App. A
Shifting from standards	No one
Equipment	Pendulum cod. MCP C163
Subcontracted phases	No one
Sampling made by	Customer
Additional notes	No one

The test results reported in this Test Report refer only to the sample sampled by our staff and / or given by the Customer as received.

The sample identification data were provided by the customer. Further additional information provided by the Customer will be reported in the Test Report with symbol #. If the information provided by the customer influences the validity of the results, MCP declines all responsibility.

Any changes / additions made to the Test Report after its first issue will be identified by underlining the text.

The Customer undertakes to reproduce this document in its entirety. Any form of partial reproduction is prohibited.

The storage times of the samples are indicated on the offer or contract to which this Test Report refers.

Examiner p.i. Nassetti Luca	MODENA CENTRO PROVE Ceramic Dept. Responsible P.I. De Pasquale Roberto	Laboratory Director Dr. Falanga Giacomo
---	---	---

**MODENA CENTRO PROVE s.r.l.**

Sede legale e Laboratori: 41123 Modena (Italy) - Via Sallustio, 78
Tel. 059 822417 r.a. - Fax 059380281 - e-mail : info@modenacentroprove.it -
www.modenacentroprove.com
C.C.I.A.A. Modena n. 228587 - Tribunale di Modena n° 2231 C.F. e P. IVA n. 01592020364



LAB N°1018L

Membro degli Accordi di Mutuo
Riconoscimento EA, IAF e ILACSignatory of EA, IAF and ILAC Mutual
Recognition Agreements**SLIP RESISTANCE OF PEDESTRIAN SURFACES MATERIALS**

Beginning date : 07/11/2023

Analysis ending date : 08/11/2023

- Room Temperature: 22 °C
- Type of slider used and method of preparation: SLIDER 96, refurbished (*conditioned according to da AS 4586:2013 p.to A.6.2.*)
- Cleaning performed on the sample: Not necessary

RESULTS

Sample	Average value BPN
1	59
2	60
3	60
4	59
5	59

- Average value SRV : 60
- Class : P5

CLASSIFICATION (AS 4586 Tab. 2)

Class	Slider 96	Slider 55
P5	>54	>44
P4	45-54	40-44
P3	35-44	35-39
P2	25-34	20-34
P1	12-24	<20
P0	<12	-

Examiner
p.i. Nassetti Luca**MODENA CENTRO PROVE**
Ceramic Dept. Responsible
P.I. De Pasquale Roberto**Laboratory Director**
Dr. Falanga Giacomo

**MODENA CENTRO PROVE s.r.l.**

Sede legale e Laboratori: 41123 Modena (Italy) - Via Sallustio, 78
Tel. 059 822417 r.a. - Fax 059380281 - e-mail : info@modenacentroprove.it - www.modenacentroprove.com
C.C.I.A.A. Modena n. 228587 - Tribunale di Modena n. 2231 - Codice Fiscale e Partita IVA n. 01592020364

MECCANICA

ECOLOGIA

CERAMICA

ALIMENTARE

1. IDENTIFICATION OF THE MIXTURE AND COMPANY ' / UNDERTAKING**1.1 Product Identifier**

Product Name: PORCELAIN TILES

REACH number: not available, as a registration number, as the substance or its uses are exempted

1.2 Relevant identified uses of the mixture and uses advised against

Identified uses: construction of floors / coatings; issue of a product subjected to firing of the individual components of the mixture after mixing with water; this procedure eliminates the risks associated with the individual components. In the installation phases in It works if they are made of the cuts you have to protect the airway.

1.3 Details of the supplier of the safety data sheet

Company: KERADOM

2. HAZARDS IDENTIFICATION**2.1 Classification of the mixture**

The finished, fired tiles are odorless, stable, non-flammable, and pose no immediate hazard to health. The fired tiles do not contain asbestos. They don't release hazardous materials after installation and are not considered hazardous waste when disposal is necessary under conditions. Respiratory, hand and eye protection may be needed to prevent excess exposure to airborne particulates if dust is produced by dry cutting the tiles during installation or if dust is produced by any other operations, including demolition/removal projects. Hands and feet protection are recommended as well.

Free from hazardous classification according to Regulation (EC) No. 1272/2008, as amended, on classification, labeling and packaging of substances and mixtures.

3. MINERAL COMPOSITION / INFORMATION**3.1 Mixtures**

Name:	N.CAS	Concentration %	Risk phrases	Pittograms
Quartz / crystalline silica	238-878-4 / 14808-60-7	28.4	H372 May cause damage to organs through prolonged or repeated exposure STOT RE 1	
Mullite	1302-93-8	10.0		
substances Minerals				
Rutile	68476-25-5	//		
Albite	68476-25-5	8.3		
Glass	65997-17-3	53.3		

Even if the CAS 65997-17-3 can be adjusted as a member of the index number 650-016-00-2 (mineral wool), the substance of this product described by this CAS number is not fibrous and consequently is not associated with a classification of carcinogen.

**MODENA CENTRO PROVE s.r.l.**

Sede legale e Laboratori: 41123 Modena (Italy) - Via Sallustio, 78
Tel. 059 822417 r.a. - Fax 059380281 - e-mail : info@modenacentroprove.it - www.modenacentroprove.com
C.C.I.A.A. Modena n. 228587 - Tribunale di Modena n. 2231 - Codice Fiscale e Partita IVA n. 01592020364

MECCANICA

ECOLOGIA

CERAMICA

ALIMENTARE

3.1.1 Components in accordance with Regulation (EC) No. 1272/2008**Quartz**

Name:	N.CAS	Concentration %	Risk phrases	Pittogrammi
Quartz / crystalline silica	238-878-4 / 14808-60-7	28.4	H372 May cause damage to organs through prolonged or repeated exposure STOT RE 1	

I compete for the text of the H-phrases is provided in section 16 of this

3.1.2 The tile contains the following major compounds

Compound	N.CAS	Weight % (*)
SiO ₂	14808-60-7	71.1
Al ₂ O ₃	1344-28-1	18.7
Fe ₂ O ₃	1309-37-1	1.24
TiO ₂	1317-80-2	0.44
CaO	1305-78-8	1.18
MgO	1309-48-4	0.41
Na ₂ O	1313-59-3	3.28
K ₂ O	2136-45-7	2.93

(*) average value

4. FIRST AID MEASURES**4.1 Description of first aid measures****Gnereale information**

Seek medical advice, show the safety data sheet to physician

If Inhaled

inhalation of this product is only possible during the laying operations, if they are made of dry cuts that frees the dust that may contain quartz powder.

In case of contact with skin

Wash with plenty of soap and water

In case of contact with eyes

Rinse immediately with plenty of water and refer to a doctor if the irritation persist.

4.2 Most important symptoms and effects, both acute and delayed

The main symptoms are described in section 2.1 on the labeling and / or in section 1.1

4.3 Indication of any immediate medical attention and special treatment

See what is indicated in 4.1. When you contact a doctor, bring the SDS.

5. FIRE-FIGHTING MEASURES**5.1 Extinguishing**

Suitable extinguishing media

Use water spray, dry chemical or carbon dioxide

5.2 Special hazards arising from the substance

No data available

5.3 Advice for firefighters

In case of fire wear, if necessary, PPE for respiratory system with independent air supply

**6. MEASURES IN CASE OF ACCIDENTAL RELEASE****6.1. Personal precautions, protective equipment and procedures in case of emergency**

See Section 8 for PPE. During crystalline silica producing process, avoid creating excessive dust. A suitable vacuum system with HEPA filters is recommended.

6.2 Environmental precautions

Avoid Leave the product left in the environment

6.3 Methods and materials for containment and cleaning up

Not applicable

6.4 Reference to other sections

For more details, see Sections 8 and 13.

7. HANDLING AND STORAGE**7.1 Precautions for safe handling**

Handle with suitable PPE. Reduce as much as possible the dust generation when cutting, e.g. Wet-cutting produces less crystalline silica than dry cutting.

7.2 Conditions for safe storage including any incompatibilities

Store in a place not exposed to rainfall events.

7.3 Specific end use

To be used for the construction of pavements, coverings, walls; pay attention during the operations that require the execution of cuts, prefer a water cut.

8. EXPOSURE CONTROLS / PERSONAL PROTECTION**8.1 Control parameters**

The product has no limit values for occupational exposure

In case of exposure to respirable dust generated during dry cutting or demolition

Major Ingredient	OSHA PEL	NIOSH IDLH	ACGIH TLV*	Units
Crystalline silica as quartz -respirable fraction	$\frac{10}{\%SiO_2 + 2}$	0.05	0.025	mg/m ³
Total dust	$\frac{30}{\%SiO_2 + 2}$	No	No	mg/m ³

* 2006 Edition, respirable fraction to be determined as per Appendix D of ACGIH TLV.

8.2 Exposure controls**8.2.1 Appropriate engineering controls**

Handle in accordance with good industrial hygiene and safety, wash your hands before and after breaks of the working day, it is preferable to use a water-cutter for dust control that comes from cutting.

Maintain air concentration below occupational exposure standards, using engineering controls if necessary.

8.2.2 Individual protection measures

For the correct evaluation of PPE to be used, please refer to the Head of Corporate Safety and a Iginiesta Industrial Eye / face protection

Wear goggles conforming to EN 166 to prevent contact with eyes.

Skin protection

Use gloves sealed in conformity with UNI EN 374 - Part 1,2,3, and comply with Directive UE89 / 686 / EEC

**Respiratory Protection**

Wearing a respiratory protection device compliant with national legal requirements is mandatory.

Environmental exposure controls

Not applicable.

9. PHYSICAL AND CHEMICAL PROPERTIES**9.1 Information on basic physical and chemical properties**

- (A) Appearance: Solid
- (B) Odour: odorless
- (C) Odour Threshold: no data available
- (D) pH: not determined
- (E) Melting temperature: not applicable
- (F) Initial boiling point and boiling range: not applicable
- (G) Flash point: not applicable
- (H) Self-flammability: not applicable
- (I) Flammability limit: not applicable
- (J) Density relative to water: not applicable
- (K) Vapour pressure: not applicable
- (L) Vapour density: not determined
- (M) Viscosity: not determined
- (N) Solubility: completely miscible
- (O) Partition coefficient: not applicable
- (P) Auto-ignition temperature: not applicable
- (Q) Decomposition temperature: not applicable
- (R) Explosive properties: not applicable.
- (S) oxidizing properties: Not applicable

10. STABILITY AND REACTIVITY**10.1 Reactivity**

The product is inert

10.2 Chemical stability

The product in its sales conditions is stable in normal conditions of use.

10.3 Possibility of hazardous reactions

None

10.4 Conditions to avoid

Avoid contact with acids

10.5 Incompatible materials

Strong reductant acids

10.6 Hazardous decomposition products

Data not available - in case of fire, see section 5 –

**11. TOXICOLOGICAL INFORMATION****11.1 Information on toxicological effects**

Tiles are monolithic objects and they generate dust only when they are dry-cut. Thus, a potential hazard for ceramic tiles due to Respirable Crystalline Silica, that is only a fraction of the generated dust, shall be taken into consideration in order to identify the possible risks for human health.

Corrosion Skin Irritation

No data available

Ocular lesions severe irritation

No data available

respiratory or skin sensitization

No data available

Germ cell mutagenicity

No data available

Carcinogenicity

Category 1A

Reproductive toxicity

No data available

Specific Target Organ Toxicity - single exposure and repeated exposure

Category 3 Respiratory tract irritation

Specific Target Organ Toxicity -repeated exposure

Category 1A respiratory effects

Danger Aspiration

No data available

12. ECOLOGICAL INFORMATION**12.1 Ecotoxicity**

Adopt good working practices and do not discharge the product into the environment

12.2 Persistence and degradability

Product resulting from a mixture of products normally present in nature

12.3 Potential for bioaccumulation

Product not bioaccumulative

12.4 Mobility in soil

Date not available

12.5 Results of PBT and vPvB

Not relevant

12.6 Other adverse effects

No data available

**MODENA CENTRO PROVE s.r.l.**

Sede legale e Laboratori: 41123 Modena (Italy) - Via Sallustio, 78
Tel. 059 822417 r.a. - Fax 059380281 - e-mail : info@modenacentroprove.it - www.modenacentroprove.com
C.C.I.A.A. Modena n. 228587 - Tribunale di Modena n. 2231 - Codice Fiscale e Partita IVA n. 01592020364

MECCANICA

ECOLOGIA

CERAMICA

ALIMENTARE

13. DISPOSAL CONSIDERATIONS

Waste should be disposed of in a landfill certified to accept such materials in accordance with federal, state, and local regulations.

Hand the solutions to a licensed company (Dlgs152 / 06 - Italy - and subsequent amendments) inert product.

14. TRANSPORT INFORMATION**14.1 UN number**

ADR / RID

Not applicable

14.2 Number of delivery by ship and UN air

IMDG

Not applicable

IATA

Not applicable

14.3 Transport hazard class

Nobody

14.4 Packing group

Nobody

14.5 Environmental hazards

ADR / RID no

IMDG and IATA no

14.6 Special precautions for user

No data

15. REGULATORY INFORMATION

The safety data sheet complies with the requirements of the EC Regulation Num.1907 / 2006

15.1 Safety, health and environmental regulations, legislation specific for the substance

No data available

15.2 Chemical Safety Assessment

No data available

16. OTHER INFORMATION

Full Text of hazard (H) and warning tips (P) mentioned in the previous sections:

H372 May cause damage to organs through prolonged or repeated exposure STOT RE 1

Note The above risk: this risk phrase is linked solely to the exposure of the powders during the laying activity that may require the cuts for the adaptation of the material to the surfaces on which they must be laid.

P260 Do not breathe dust that is generated from the cuts of the material

**MODENA CENTRO PROVE s.r.l.**

Sede legale e Laboratori: 41123 Modena (Italy) - Via Sallustio, 78
Tel. 059 822417 r.a. - Fax 059380281 - e-mail : info@modenacentroprove.it - www.modenacentroprove.com
C.C.I.A.A. Modena n. 228587 - Tribunale di Modena n. 2231 - Codice Fiscale e Partita IVA n. 01592020364

MECCANICA

ECOLOGIA

CERAMICA

ALIMENTARE

16.1 release

The information contained in this SDS reflect the current available knowledge and is reliable provided that the product is used according to the prescribed conditions. Any other use of the product, including the use of the product in combination with other products or processes, is the user's responsibility.

And 'implicit that the user is responsible for specifically identified security measures and applying the appropriate operating procedures concerning the prevention of risks in their activities.