

TUSCAN COTTO 3.0 SERIES

TUSCAN COTTO 3.0

envelops contemporary spaces in a warm and distinctively bold ambience. The on-trend colours of Burgundy Red and Brown Taupe boast a natural terracotta texture and P4 slip-resistant finish.



PRODUCT TYPE: Terracotta

COLOURS: Burgundy Red and Grey Taupe

SIZES: 150x150mm, 60x240mm and 300x300mm
Non-Rectified Edges

FINISHES/USAGE:

Matt/Wall & Floor

AESTHETIC QUALITIES:


Understated, Earthy & Sophisticated

TECHNICAL DATA:

P4 Pendulum Slip Rating

- Sealing is required prior and post grouting for **all sizes**.
- Dark grout colours are not recommended.
- Minimum 10mm grout joints are recommended.

VARIATION:




V1

More Technical data is located on the last page.


TUSCAN COTTO 3.0 SERIES

PRODUCT OVERVIEW

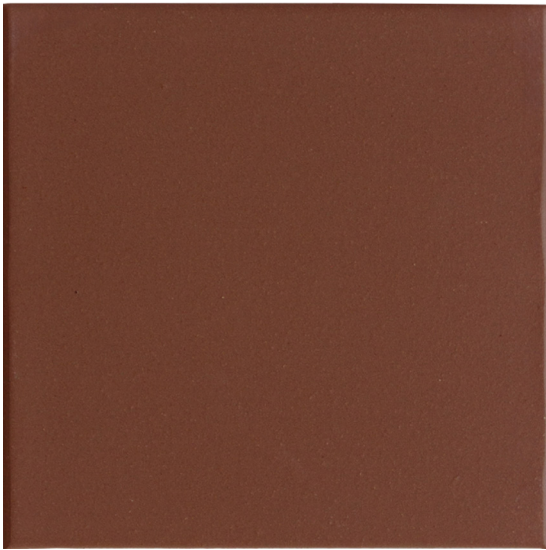

Tuscan Cotto 3.0 Burgundy Red

Matt 150x150x12mm | 300x300x11mm

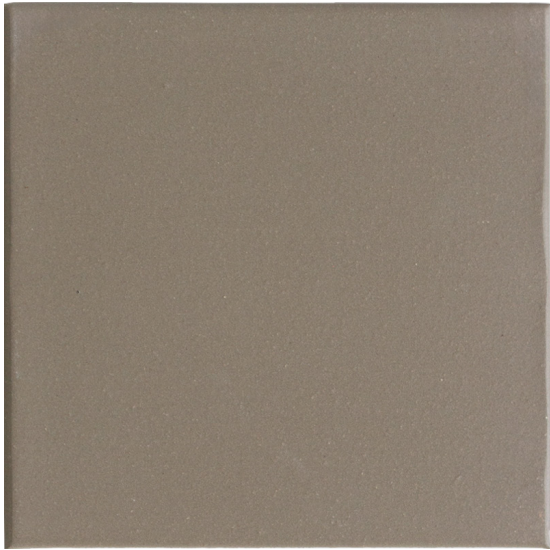

Tuscan Cotto 3.0 Grey Taupe

Matt 150x150x12mm | 300x300x11mm



Tuscan Cotto 3.0 Burgundy Red

Matt 60x240x9mm



Tuscan Cotto 3.0 Grey Taupe

Matt 60x240x9mm



Variation is an inherent property of tiles and stone. Sizes are nominal and may include a joint.

TUSCAN COTTO 3.0 SERIES

PRODUCT LIFESTYLE



Tuscan Cotto 3.0 Grey Taupe

Matt

150x150x12mm | 300x300x11mm



Tuscan Cotto 3.0 Grey Taupe

Matt

60x240x9mm

Variation is an inherent property of tiles and stone. Sizes are nominal and may include a joint.

TUSCAN COTTO 3.0 SERIES

PRODUCT LIFESTYLE



Tuscan Cotto 3.0 Burgundy Red



Tuscan Cotto 3.0 Burgundy Red

Matt

150x150x12mm | 300x300x11mm



Tuscan Cotto 3.0 Burgundy Red

Matt

60x240x9mm

Variation is an inherent property of tiles and stone. Sizes are nominal and may include a joint.

TUSCAN COTTO 3.0 SERIES

TECHNICAL DATA - BRICKS

	technical characteristics	test method	result
	water absorption	ISO 10545-3	5,75%
	modulus of rupture	ISO 10545-4	27,78 MPa
	impact resistance	ISO 10545-5	0,80
	coefficient of thermal expansion	ISO 10545-8	6,4
	deep abrasion resistance	ISO 10545-6	275 mm ³
	moisture expansion	ISO 10545-10	0,22 mm/m
	resistance to frost	ISO 10545-12	> 100
	surface scratch hardness	-	6 Mohs

Variation is an inherent property of tiles and stone. Sizes are nominal and may include a joint.

TUSCAN COTTO 3.0 SERIES

TECHNICAL DATA - TILES

	technical characteristics	test method	result	SEALING INFORMATION
	water absorption	ISO 10545-3	7,09%	All Natural Terracotta must be pre-sealed prior to laying and grouting and again post grouting using suitable sealer.
	modulus of rupture	ISO 10545-4	20,7 MPa	
	impact resistance	ISO 10545-5	0,80	
	coefficient of thermal expansion	ISO 10545-8	7,4	
	deep abrasion resistance	ISO 10545-6	215 mm ³	
	moisture expansion	ISO 10545-10	0,228 mm/m	
	resistance to frost	ISO 10545-12	> 100	
	coefficient of friction	-	0,67 dry 0,58 wet	

Variation is an inherent property of tiles and stone. Sizes are nominal and may include a joint.