

ANDES SERIES


Showcasing contemporary flair and a seamless neutral palette, **ANDES** is well suited to modern design themes and effortlessly creates a harmonious setting. An ideal solution for open-plan layouts or elegant and refined spaces, Andes comes in multiple sizes and surfaces, as either a floor or wall finish.



- PRODUCT TYPE:** Glazed porcelain
- COLOURS:** Warm White, Almond Beige, Grey and Charcoal
- SIZES:** 60x200mm, 300x300mm, 300x600mm, 400x600mm, 600x600mm, 700x800mm and 600x1200mm
Rectified Edges

- FINISHES/USAGE:** Matt and Grip/Wall and Floor
- AESTHETIC QUALITIES:** Mix stone surface
- TECHNICAL DATA:** P3 Pendulum Slip rating (Matt)
P5 Pendulum Slip rating (Grip)
P5 Pendulum Slip rating (Grip Paver)
More technical data on last page
- CERTIFICATIONS:**

VARIATION:



V3



Variation is an inherent property of tiles and stone. Sizes are nominal and may include a joint.

ANDES SERIES

PRODUCT INFORMATION



Warm White

Matt	60x200mm 300x300mm 300x600mm 600x600mm 600x1200mm 1200x2700mm
Grip	300x600mm 600x600mm
Grip Paver	600x600x20mm
Grip Coping	400x600x20mm
Matt & Grip Crazy Pave	700x800mm



Variation is an inherent property of tiles and stone. Sizes are nominal and may include a joint.

ANDES SERIES



Almond Beige

Matt	60x200mm 300x300mm 300x600mm 600x600mm
Grip	300x600mm 600x600mm
Grip Paver	600x600x20mm
Grip Coping	400x600x20mm
Matt & Grip Crazy Pave	700x800mm



Variation is an inherent property of tiles and stone. Sizes are nominal and may include a joint.

ANDES SERIES



Grey

Matt	60x200mm 300x300mm 300x600mm 600x600mm 600x1200mm
Grip	300x600mm 600x600mm
Grip Paver	600x600x20mm
Grip Coping	400x600x20mm



Variation is an inherent property of tiles and stone. Sizes are nominal and may include a joint.

ANDES SERIES



Charcoal

Matt	60x200mm 300x300mm 300x600mm 600x600mm
Grip	300x600mm 600x600mm
Grip Paver	600x600x20mm
Grip Coping	400x600x20mm



Variation is an inherent property of tiles and stone. Sizes are nominal and may include a joint.

ANDES SERIES



Warm White Coping Drop Edge

Grip

400x600x20mm



Almond Beige Coping Drop Edge

Grip

400x600x20mm



Grey Coping Drop Edge

Grip

400x600x20mm



Charcoal Coping Drop Edge

Grip

400x600x20mm



Variation is an inherent property of tiles and stone. Sizes are nominal and may include a joint.

ANDES SERIES



Warm White Crazy Pave

Matt

700x800mm



Warm White Crazy Pave

Grip

700x800mm



Almond Beige Crazy Pave

Matt

700x800mm



Almond Beige Crazy Pave

Grip

700x800mm



Variation is an inherent property of tiles and stone. Sizes are nominal and may include a joint.

ANDES SERIES

WARM WHITE VARIATION



- **600x1200mm** - 10 tile faces
- **600x600mm** - 20 tile faces

ANDES SERIES

ALMOND BEIGE VARIATION



- **600x1200mm** - 10 tile faces
- **600x600mm** - 20 tile faces

ANDES SERIES


GREY VARIATION



- **600x1200mm** - 10 tile faces
- **600x600mm** - 20 tile faces

ANDES SERIES

CHARCOAL VARIATION

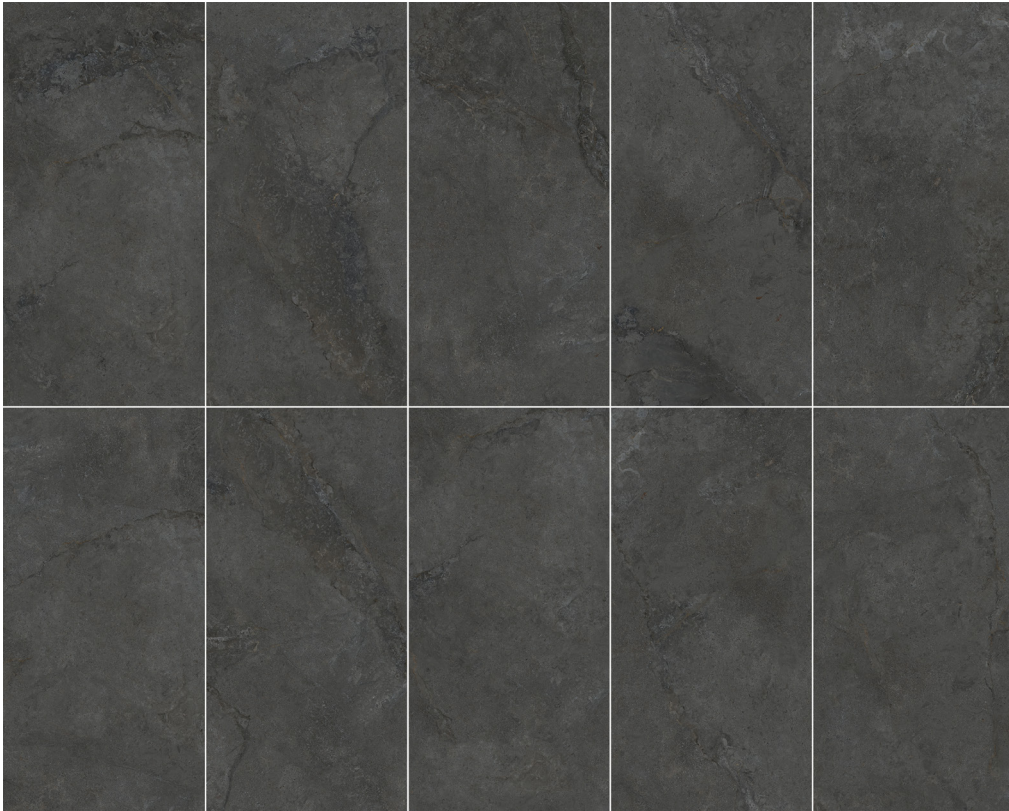

- **600x1200mm** - 10 tile faces
- **600x600mm** - 20 tile faces

ANDES SERIES

TECHNICAL DATA - TILE

	technical characteristics	test method	required values	result
	water absorption	ISO 10545-3	≤0.5%	≤0.5%
	breaking strength	ISO 10545-4	≥1300N	2265N
	shock resistance	ISO 10545-11	Pass	Pass
	chemical resistance	ISO 10545-13	Declared value	Pass
	resistance to frost	ISO 10545-12	Resistant	Pass
	staining resistance	ISO 10545-14	Minimum Class 3	Pass

Variation is an inherent property of tiles and stone. Sizes are nominal and may include a joint.

ANDES SERIES

TECHNICAL DATA - PAVER

	technical characteristics	test method	result
	water absorption	ISO 10545-3	≤0.5%
	breaking strength	ISO 10545-4	8500N
	max warpage	ISO 10545-2	±2.0mm
	max edge curvature	ISO 10545-2	±2.0mm
	chemical resistance	ISO 10545-13	Pass
	resistance to frost	ISO 10545-12	Pass
	staining resistance	ISO 10545-14	Pass

Porcelain Pavers and Coping tiles must be installed to Australian Standards (AS 3958.1, AS 3958.2 & AS 3727-2016) using correct procedures and products such as Mapei Ultralite S1.
No spot fixing under any circumstances.

Please note that all products must be fabricated using score & snap method and/or wet cutting in conjunction with AS/NZS 1716:2012, AS/NZS 1715:2009, AS/NZS 60335.2.69:2017" For more information please refer to: <https://www.safework.nsw.gov.au>

CERTIFICATIONS



ISO 14001:2015 specifies the requirements for an environmental management system that an organization can use to enhance its environmental performance. ISO 14001:2015 is intended for use by an organization seeking to manage its environmental responsibilities in a systematic manner that contributes to the environmental pillar of sustainability.




An Environmental Product Declaration (EPD) is a globally recognised certification that outlines the environmental impact of a product across its entire life cycle. It supports sustainable decision-making and green procurement by assessing factors such as material sourcing, emissions, installation, use, and end-of-life disposal.

INSTALLING PAVER COPING DROP EDGE

Important: When installing Andes Paver Coping Drop Edge tile, the underside and 20mm drop edge must be adhered to the substrate.

When applying full adhesion to paver coping drop edge, it's essential to ensure proper surface preparation, including cleaning and drying the surfaces to be bonded. The adhesive used should be appropriate for the materials being bonded and should be applied according to the manufacturer's instructions. Full adhesion can provide a strong and durable bond between the coping pavers and the substrate. It's important to follow best practices and manufacturer recommendations when applying full adhesion to a paver coping drop edge to ensure a secure and long-lasting installation.

Paver coping is not suggested for fiberglass pools due to potential issues with flexibility, weight, compatibility, and installation challenges.

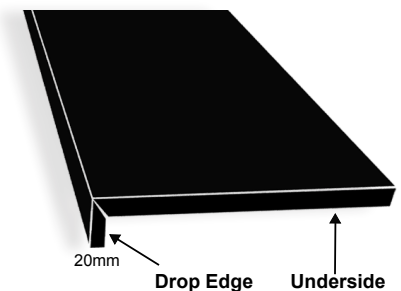

Variation is an inherent property of tiles and stone. Sizes are nominal and may include a joint.